



## Serie 3 PUR ANT

食品级轻型弯曲灵活聚氨酯软管，硬质PVC塑筋加强，铜丝接地可排静电



Structure : Flexible ducting made out of food-grade polyether polyurethane wall in accordance with the modified EU regulation 10/2011, reinforced with shock-resistant PVC spiral, copper wire for grounding.

Applications : Designed for suction and transport of abrasive particles, granules, waste, dust, in wood, pharmaceutical and plastic industry, sweepers, lawn mowers. Good resistance to hydrolysis, microbes and abrasion.

结构：欧洲食品级标准聚醚型聚氨酯软管，内壁光滑、弯曲灵活，结实耐用，铜丝接地可排静电

应用：木工、制药、塑胶行业中用来输送和抽吸磨损性物料颗粒粉体，扫路车和割草机上使用的软管。抗菌抗水解，耐磨。



Printing | Marquage :

S3 PUR ANT  CE 10/2011 n°lot


温度范围：

- 30 / + 80 °C  
- 22 / + 176 °F

特性：

内壁光滑，弯曲灵活，结实耐用

Colors | Couleurs :

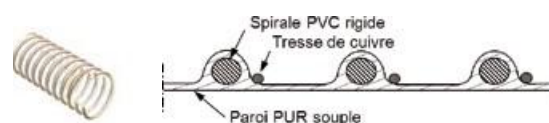

多种接头可供选择

int mm	kg/m	mm	mm	bar	bar	m
20	0,170	0,50	30	1,80	0,63	25
25	0,190	0,55	37,5	1,60	0,63	25
30	0,235	0,55	45	1,50	0,63	25
32	0,250	0,55	48	1,50	0,63	25
35	0,270	0,55	52,5	1,50	0,63	25
38	0,300	0,60	57	1,50	0,50	25
40	0,310	0,60	60	1,50	0,50	25
45	0,350	0,60	67,5	1,50	0,45	25
50	0,385	0,60	75	1,50	0,45	25
60	0,465	0,60	90	1,00	0,30	25
65	0,545	0,65	97,5	1,00	0,30	25
70	0,585	0,70	105	1,00	0,26	25
75	0,630	0,70	112,5	1,00	0,26	25
80	0,700	0,70	120	1,00	0,16	25
90	0,800	0,70	135	1,00	0,16	25
100	0,920	0,70	150	1,00	0,16	25
110	1,000	0,75	165	0,80	0,16	10
120	1,110	0,75	180	0,80	0,16	10
125	1,165	0,80	187,5	0,80	0,16	10
140	1,375	0,85	210	0,60	0,16	10
150	1,540	0,85	225	0,60	0,16	10
160	1,642	0,90	240	0,50	0,16	10
180	2,105	1,00	270	0,50	0,16	10
200	2,340	1,10	300	0,40	0,15	10
250	2,925	1,10	375	0,30	0,16	10